

AC Intelligent Load


STLD-AC220V/380V-25KW-AT-R



Product overview

Saiter, The 8U standardized module design can be installed in the standard cabinet for laboratory testing, but also can be installed in the portable box for the field rapid construction test system, easy to carry. Multiple modules can be used in parallel, and the power supply between each module can be cascaded with special cables, which is easy to use. With short circuit, overload, overvoltage, overcurrent protection functions, safe and reliable. It can be combined with the standard 4U A C EV analog module according to customer needs, which is economical and practical.

Product application

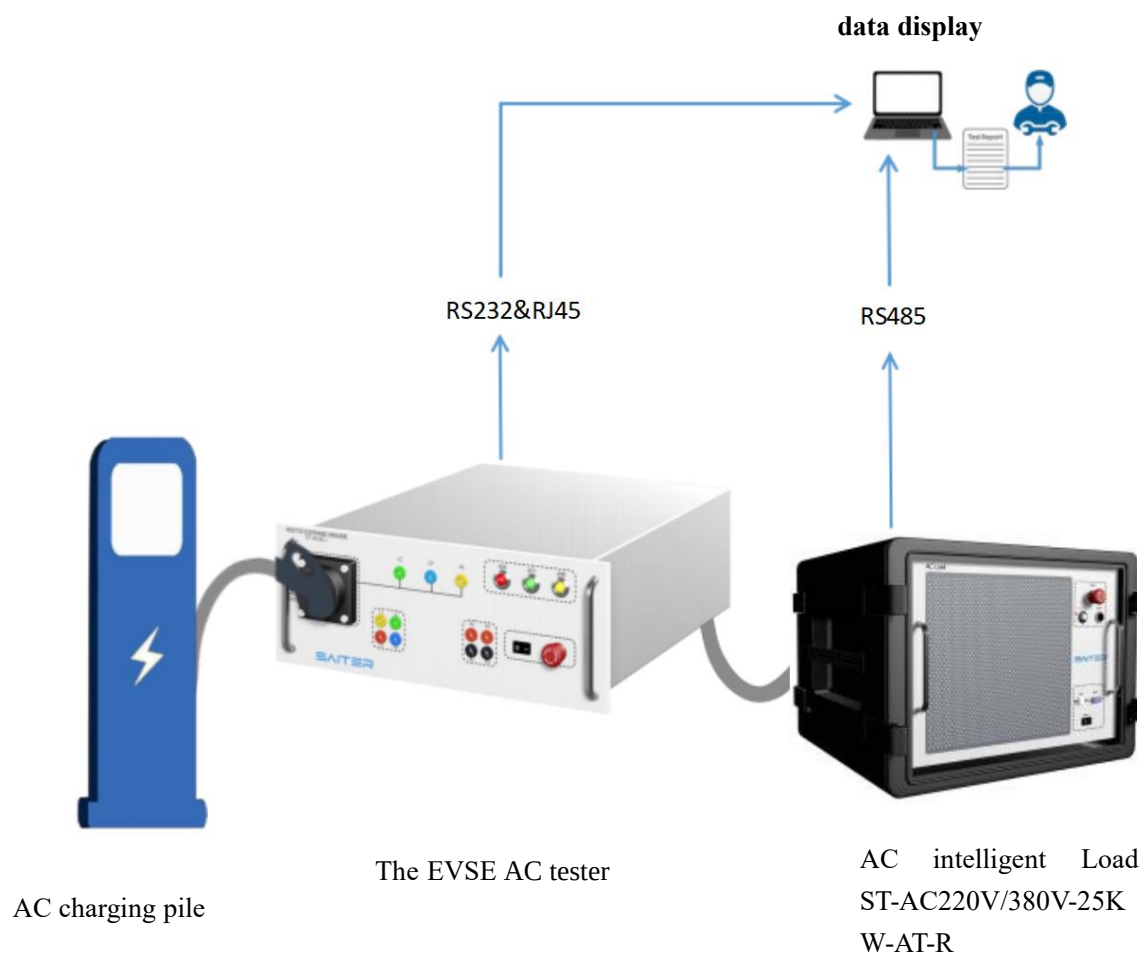



Product parameters table

article	AC intelligent Load
model	STLD-AC220V/380V-25KW-AT-R
rated voltage	AC220V/AC380V
rated frequency	50Hz
power rating	8.3KW/25KW (220V/380V)
Step power	0.01KW(380V)
control mode	Programming (Programmode requires mode)
screen	7-inch touch screen (optional)
defensive function	Over voltage, over current, overload and short circuit
input mode	Terminal block
working power supply	220VAC±10%, 50Hz
dimension	W483 * H355.5 * L476.5mm
noise	≤85dB
Environment requirement	Working temperature: - 20℃~50℃ Storage temperature: - 30℃~70℃ Relative humidity: ≤ 90% Rh (10℃ to 30℃); ≤ 75% Rh (30℃ to 40℃); ≤ 45% Rh (40 to 50℃)

Software interface introduction:

(Touch-screen interface display (optional))

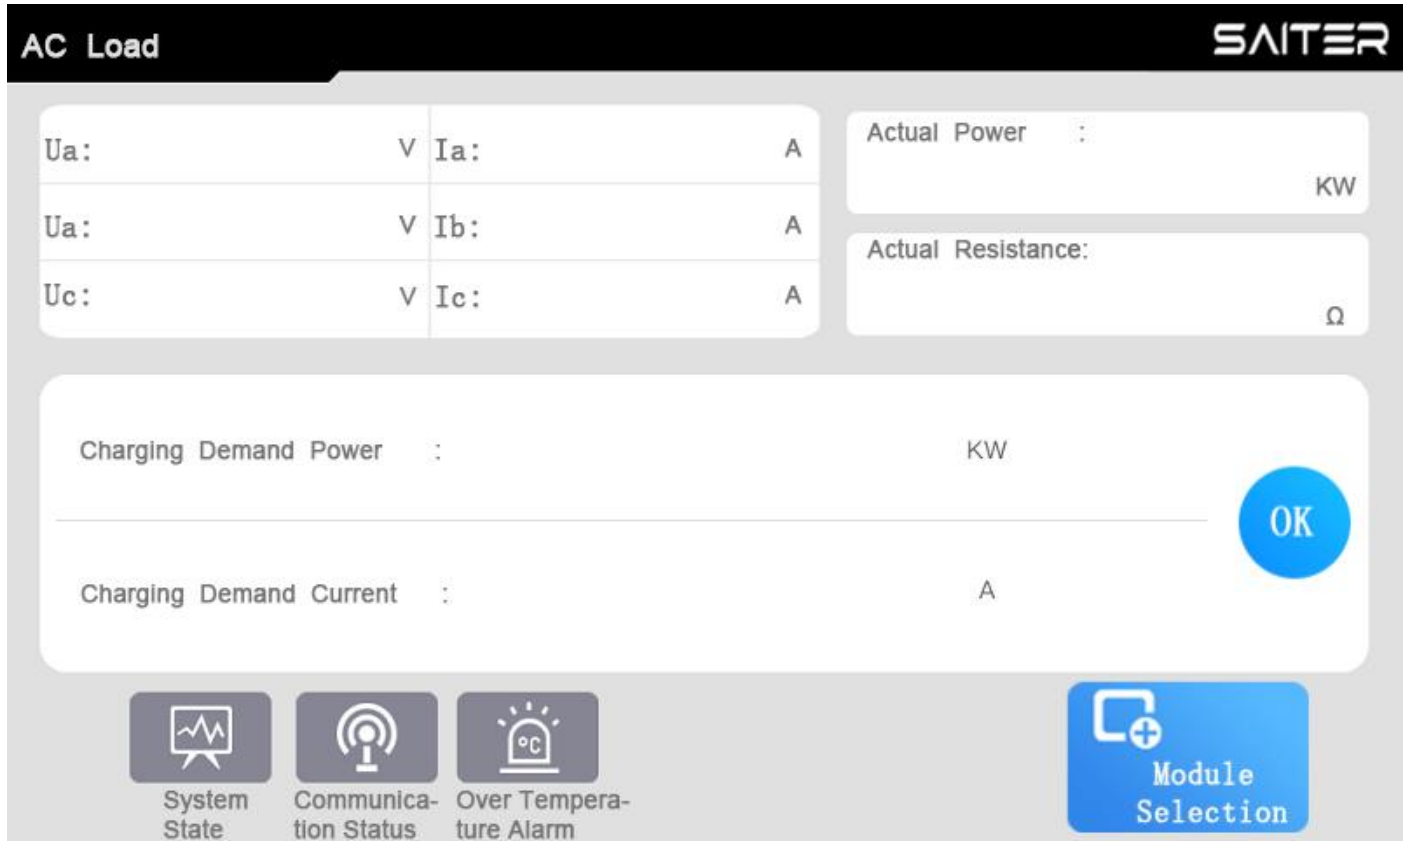

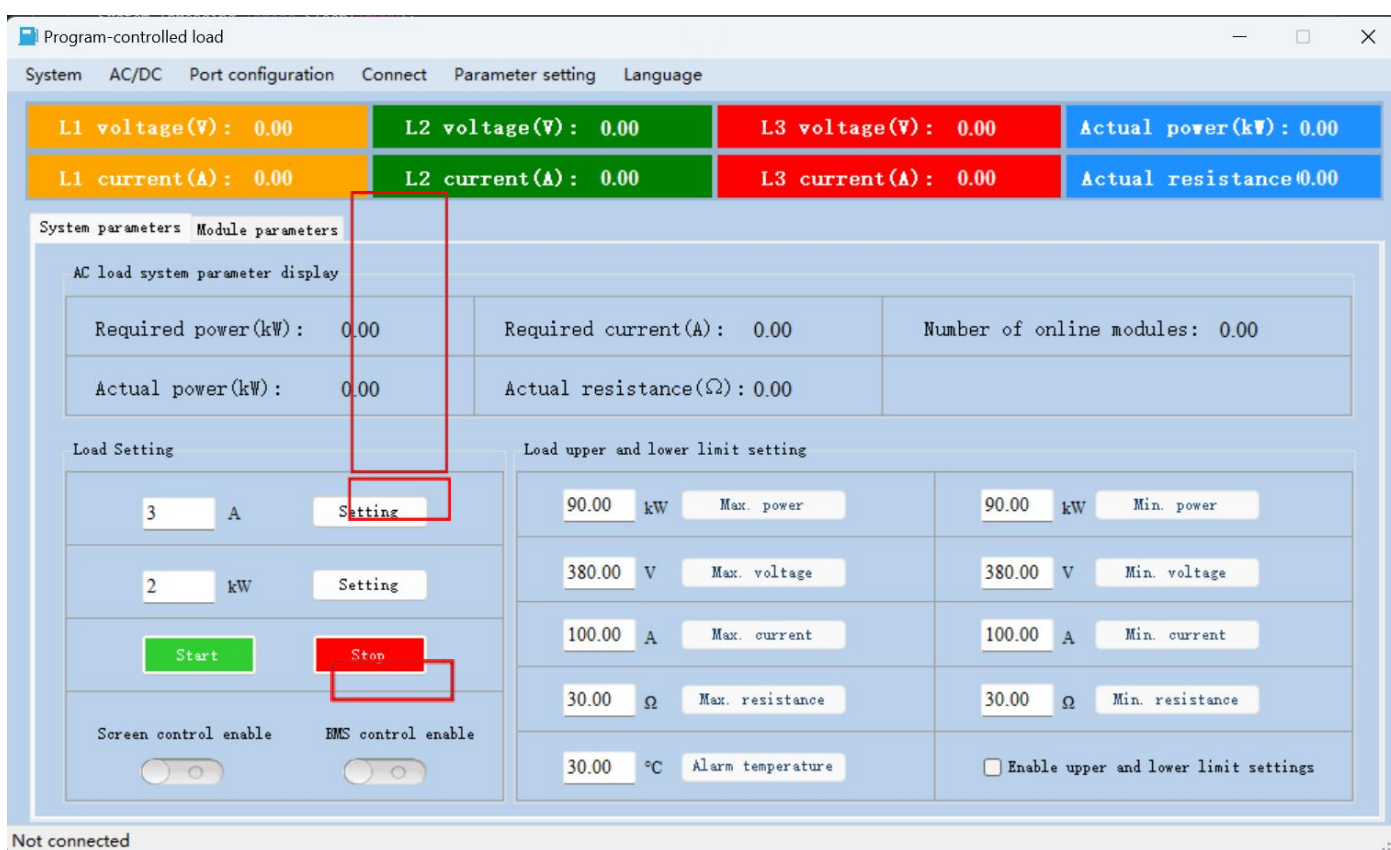

Product display

operation panel



Status indicator light


emergency
stop button

buzzer

communication
interface

Power button

Backpanel

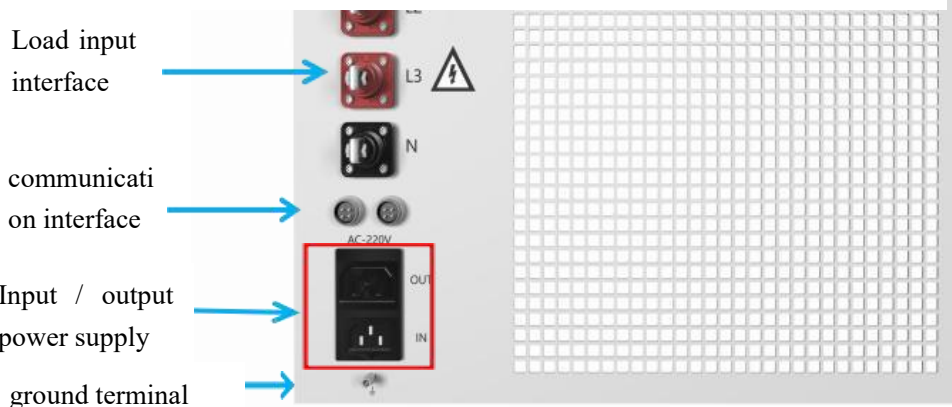

Load input
interface

communicati
on interface

Input / output
power supply

ground terminal

Appearance size:



No shell size:



Product accessories list:

NO.	Product name	Model	Unit	Qty	Whether Consumable	Guarantee period	Remarks
1	power line	National Standard three-hole-10A -1.5 m line length	Pcs	1	-		
2	Load connection line	16mm ² * 4-2 m line length	Set		2	-	-

